


STEM EXTENSION WITH "T" HANDLE

TYPE 5710 FOR MOUNTING ON BALL VALVE TYPE 1211/1311

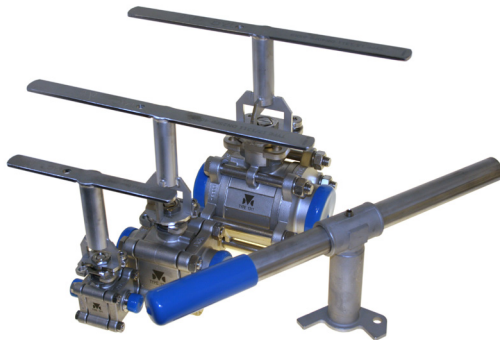

GENERAL


ISO FLANGE: F03-04/9MM (DN10FB - 25RB)
 F04-05/11MM (DN25FB - 40RB)
 F05-07/14MM (DN40FB - 65RB)
 F07-10/17MM (DN65FB - 100FB)

MATERIAL: AISI 304/CF3M

OPTION

MATERIAL: AISI316, DN10 - 65RB
 HEIGHT: CUSTOMIZED, DN10 - 65RB

DIMENSION

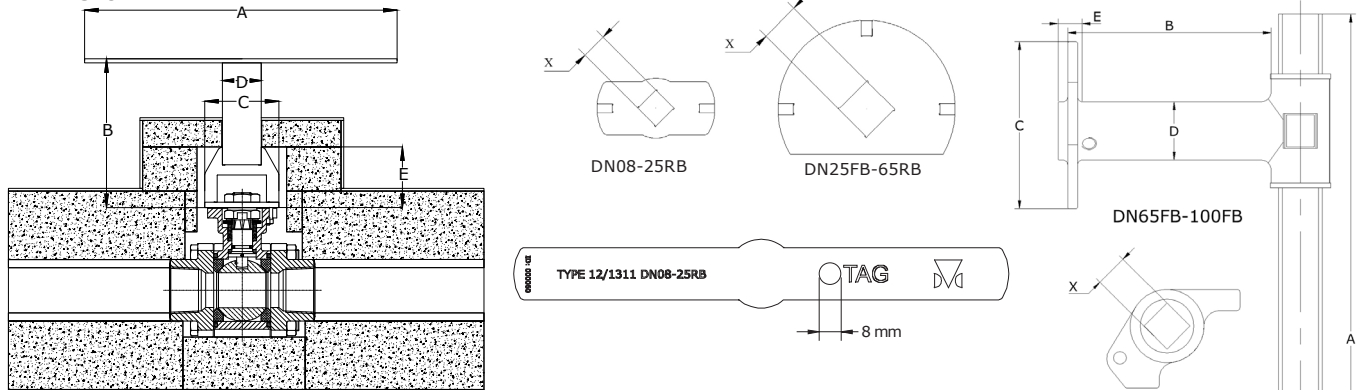

DIMENSION 1211/1311				DIMENSION					
REDUCED BORE		FULL BORE		A [MM]	B [MM]	C [MM]	D [MM]	E [MM]	X [MM]
DN15	1/2"	DN10	3/8"	180	100	42	22	37	9
DN20	3/4"	DN15	1/2"	180	100	42	22	37	9
DN25	1"	DN20	3/4"	180	100	42	22	37	9
DN32	1 1/4"	DN25	1"	300	112	50	22	47	11
DN40	1 1/2"	DN32	1 1/4"	300	112	50	22	47	11
DN50	2"	DN40	1 1/2"	300	112	63	22	47	14
DN65	2 1/2"	DN50	2"	300	112	63	22	47	14
DN80	3"	DN65	2 1/2"	400	96	80	34	13	17
DN100	4"	DN80	3"	400	96	80	34	13	17
		DN100	4"	400	96	80	34	13	17

DESCRIPTION

- **Stem extension with T-handle** for 3-pcs ball valve Type 1210/1310.
- **Solid construction** 3 - 4mm AISI 304.
- **Corrosion resistant** - made of stainless steel AISI 304.
- **Easy installation** - requires no modification of the ball valve stem.
- **TAG numbering** - hole drilled for TAG-plate.
- **Easy insulation** - because of the cylindrical shape of the stem extension it is easy to isolate.

DS-5710-31-UK-06-2016-REV. B
We reserve the right for changes.

